


Spule / Reel VM 610/127-610

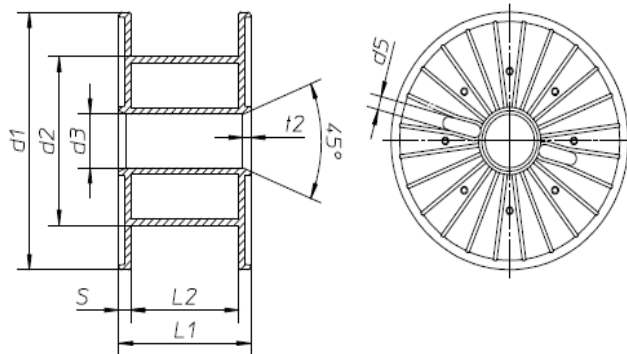

Maße / dimensions :

d 1	[mm]	610	24,0	[inch]
d 2	[mm]	400	15,7	[inch]
d 3	[mm]	127	5,0	[inch]
d 5	[mm]	32	1,3	[inch]
L 1	[mm]	610	24,0	[inch]
L 2	[mm]	560	22,0	[inch]
t 2	[mm]	20	0,8	[inch]
S	[mm]	25	1,0	[inch]
V	[cm ³]	92286	5638,7	[inch ³]

Material / material:

Spule aus ABS / reel in ABS material
 Auch andere Qualitäten lieferbar. / also available in other material qualities

Besonderheiten / peculiarity:

Mögliche Wickelbreite von 50 bis 560 mm. / Possible winding width from 50 to 560mm
 Zentralbohrung von 16 bis 127 mm möglich. / Bore diameter possible from 16 to 127mm
 Zusätzliche Verschraubung möglich. / Additional screws and bolts available

Einsatzzweck / application:

Lieferspule für z. B.: Supraleiter oder ähnliches, / Delivery spool for e.g. superconductor, round and square wire
 rund und viereck Querschnitte.

Verpackung / packaging:

auf Anfrage / on request